



Luminaire Schedule						
Symbol	Qty	Label	Arrangement	Lumens	LLF	Description
□	6	EXISTING WALL PACKS	SINGLE	15000	0.740	EXISTING WALL PACKS
⊕	4	VRSG-5-12W TRIPLE	3 @ 90 DEGREES	110000	0.740	POLE MOUNTED TRIPLE LUMINAIRES AT 28' -1000W-METAL HALIDE
⊕	2	VRSG-5-12W	4 @ 90 DEGREES	110000	0.740	POLE MOUNTED QUAD LUMINAIRES AT 28' -1000W-METAL HALIDE

Calculation Summary							
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
MAIN FRONT LOT	Illuminance	Fc	17.23	110	1.5	11.49	73.60
MAIN LOT INTERIOR	Illuminance	Fc	24.54	171	0.3	81.80	568.33

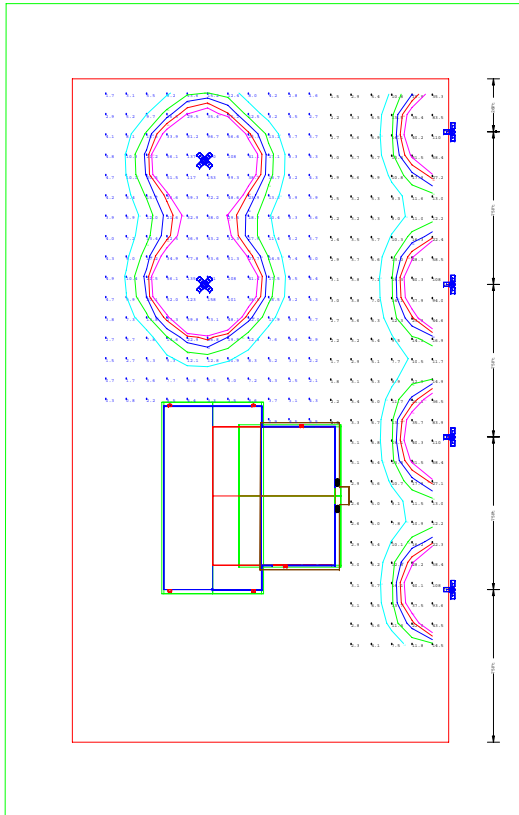

NOTES:
 POLES ARE SQUARE 25' X 5" X 7GA STEEL
 ALL LUMINAIRES POLE MOUNTED ON EXISTING BASES WITH 11" BOLT CIRCLE
 ALL FIXTURES 1000W METAL HALIDE

MIKE HYING - LANCASTER MOTORS
 PLAN B - VERSALUX SHOEBOXES

Date: 9/25/2008

Dustin Smith
 RLL Design, LP
 300 Shepherd Dr STE B
 Houston, TX 77007
 Voice Number : 713-863-7699 x 105
 Fax Number : 713-979-1429
 Email Address : dustin@rlldesign.com

RLL DESIGN COMMERCIAL LIGHTING



