



Luminaire Schedule						
Symbol	Qty	Label	Arrangement	Lumens	LLF	Description
	6	EXISTING WALL PACKS	SINGLE	15000	0.740	EXISTING WALL PACKS
	2	SVL22-3-1KM	4 @ 90 DEGREES	110000	0.740	POLE MOUNTED QUAD LUMINAIRES AT 28' -1000W-METAL HALIDE
	4	SVL22-3-1KM	TWIN	110000	0.740	POLE MOUNTED LUMINAIRES AT 28' -1000W-METAL HALIDE
	4	SVL22-4-1KM	SINGLE	110000	0.740	POLE MOUNTED LUMINAIRES AT 28' -1000W-METAL HALIDE

Calculation Summary							
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
MAIN FRONT LOT	Illuminance	Fc	19.30	39.3	6.1	3.16	6.44
MAIN LOT INTERIOR	Illuminance	Fc	21.47	49.8	4.3	4.99	11.58

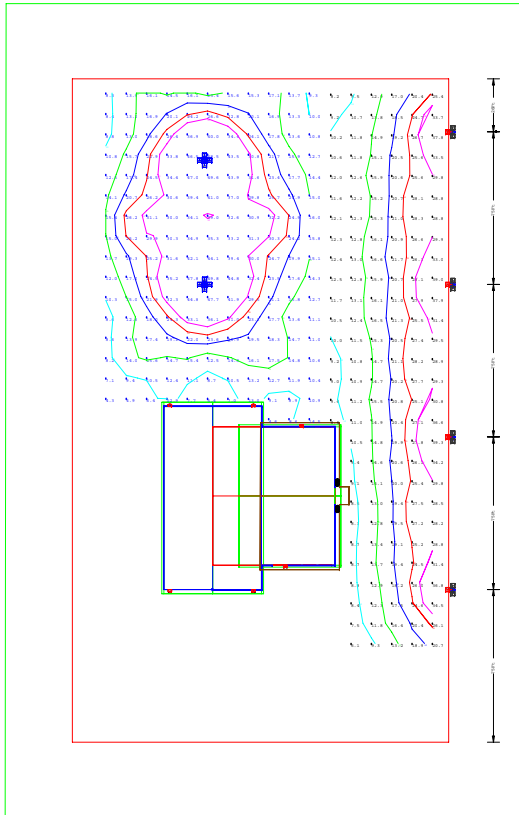

NOTES:
 POLES ARE SQUARE 25' X 5" X 7GA STEEL
 ALL LUMINAIRES POLE MOUNTED ON EXISTING BASES WITH 11" BOLT CIRCLE
 ALL FIXTURES 1000W METAL HALIDE

MIKE HYING - LANCASTER MOTORS
 PLAN A - SVL VERTICAL BURN FIXTURES

Date: 9/25/2008

Dustin Smith
 RLL Design, LP
 300 Shepherd Dr STE B
 Houston, TX 77007
 Voice Number : 713-863-7699 x 105
 Fax Number : 713-979-1429
 Email Address : dustin@rlldesign.com

RLL DESIGN COMMERCIAL LIGHTING

